


15-1 ASSEMBLY NITRILE

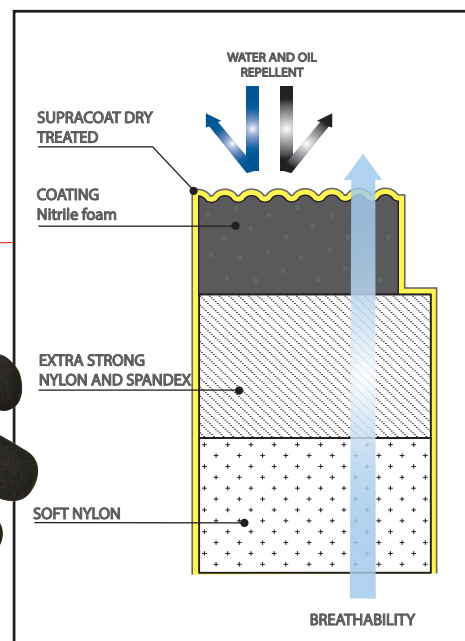

Name	15-1 ASSEMBLY NITRILE	Art. No	15-1ANI
Glove purpose	Tight fit, cool feel good oil resistance CE catII EN388: 4131	Glove thickness	Back of hand: 0,7-0,8mm Palm: 0,9-1,0mm
Materials	Glove inside: Cool, soft and moisture transporting nylon Outside: Extra strong nylons and Spandex, the entire glove is treated with SupraCoat Dry oil and water repellency	Grip	The glove has very good dry and wet grip.
Fitting (elastic tight, tight, close, loose)	The glove has an elastic tight fit	Breathing	The palm and back has good breathing as well as very good moisture transport capacity.
Abrasion	Very high resistance to abrasion	Disposal	No special waste
Cut	Cut resistance is provided by high strength and low hardness Strength ●●○○○ Hardness ○○○○○	Storage and cleaning notice	Wash in 40 degrees, store in cool, dry and dark place. Slow degradation of coating over several years of storage.
Tear	Relatively high tear resistance beware of danger of entangling.	Chemical safety	Free from organic solvents (such as DMF), softeners (such as phthalates), does contain small amount of Zink organic accelerators. The cuff elastic bands does contain very small amounts of latex covered by polyester.
Heat and insulation	The glove has a relatively high conductivity to heat, avoid contact with heated objects. Not suitable for cold temperatures.	Colour	Grey with black coating
Water/Oil	The entire glove is oil and water repellent, The Nitrile foam has improved resistance against organic solvents	Size	Available sizes 7-11
Puncture	Very poor puncture(1,0mm flat tip)resistance, very poor needle (0,1mm flat tip) resistance and very limited hypodermic needle resistance	Packaging	6 pairs per bag/ 10 bags per case. 60 pairs per carton
Impact	No impact protection	Classification	EN388 4131 CE CAT II
Suitable industries			

PROTECTION LIMITS AND COMMENTS

2013-10-24

Y. Berger & Co AB
 Ingela Gathenhielms gata 3
 SE 421 30 Västra Frölunda, Sweden
 +46 31 49 09 40
 www.eurekasafety.se

